


WIRING DIAGRAM

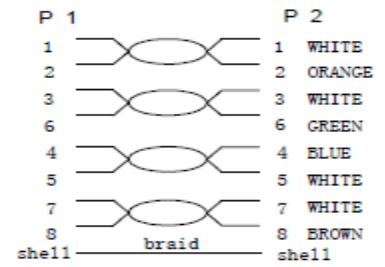

NOTE:

- 100% open short & miss wire test
- Fluke channel test:
TEST LIMIT:ISO11801 Channel Class EA
- Operating temperature:-20°C ~ + 75°C
- ROHS2.0 AND REACH COMPLIANT
- SPRAY WORD:Ultraflex CAT.6A S/FTP 4*2*26AWG/7 LSZH 500MHz
ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2
- PoE, PoE+ and PoE++ COMPLIANT

MATERIAL LIST:

③	OVER MOLD	PVC (Color same as wire)	2PCS	
②	PLUG	POLY CARBONATE RJ45 8P8C PIN GOLD PLATED 3U", SHELL PLATE NICKEL , TRANSPARENT YELLOW (UL 94-V2)	2PCS	
①	CABLE	S/FTP CAT.6A 26AWG(BC+AL-FOIL)*4PAIR+Braid(AL-MG)+ Ultraflex LSZH/83A(IEC60332-1-2) OD:6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

						CUSTOMER		HK		ITEM NO.		See The Chart	
						PRODUCT NAME		Ultraflex CAT.6A S/FTP PATCH CORD 26AWG		UNO ITEM NO.		F217312 UNIT MM	
		NEW		2020-10-22		A		DRAWNBY		CHECKBY		APPROVE	
BY		CHK		REVISION RECORD MODIFICATIONS		DATE		REV.		Arvin		Alvan	
												2020-10-22	